



# FFD110-12

(Group Size: 31)

Deep Cycle Sealed  
Maintenance-Free  
AGM Battery



## CRANKING PERFORMANCE

CA 32°F	CCA 0°F
1050	850

## RESERVE CAPACITY

@25 AMPS	@75 AMPS
205 Minutes	50 Minutes

## CONSTANT CURRENT DISCHARGE (Amps)

CUT OFF VOLTAGE V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	154	102	77	60.6	32.5	28	16.4	10.6	9	7.7	5	4.3


## SPECIFICATIONS

Nominal Voltage		<b>12 Volt</b>
Rated Capacity (20 hour rate)		<b>110 AH</b>
Dimensions	Total Height (including terminals)	<b>241 mm (9.49")</b>
	Height	<b>214 mm (8.43")</b>
	Length	<b>328 mm (12.91")</b>
	Width	<b>172 mm (6.77")</b>
Weight		<b>30 kg (66.14 lbs)</b>


## CHARACTERISTICS

<b>Capacity</b> 77°F (25°C)	20 Hour Rate (1.75A to 10.5 Volts)	<b>110AH</b>
	10 Hour Rate (9.0A to 10.5 Volts)	<b>90AH</b>
	5 Hour Rate (16.4A to 10.2 Volts)	<b>82AH</b>
<b>Internal Resistance</b>	Full charged Battery 77°F (25°C)	<b>9m Ω</b>
<b>Capacity Affected by Temperature</b> (20 Hour Rate)	104°F (40°C)	<b>102%</b>
	77°F (25°C)	<b>100%</b>
	32°F (0°C)	<b>85%</b>
	5°F (-15°C)	<b>65%</b>
<b>Self-Discharge</b> 77°F(25°C)	Capacity after 3 month storage	<b>91%</b>
	Capacity after 6 month storage	<b>82%</b>
	Capacity after 12 month storage	<b>64%</b>
<b>Max. Discharge Current</b> 77°F (25°C)	<b>1600A (5s)</b>	
<b>Terminal</b>	Standard	M8 + TP08
<b>Charging</b> (Constant Voltage)	<b>Cycle</b>	Initial Charging Current $\leq 0.2 \times C20$ 13.9 V ~ 14.2 V/77°F (25°C)
	<b>Float</b>	13.3 V ~ 13.5 V/77°F (25°C)

## DISCHARGE CHARACTERISTICS

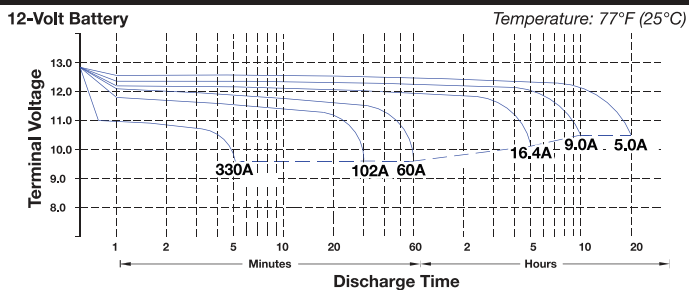

## SIZE & DETAILED ILLUSTRATION

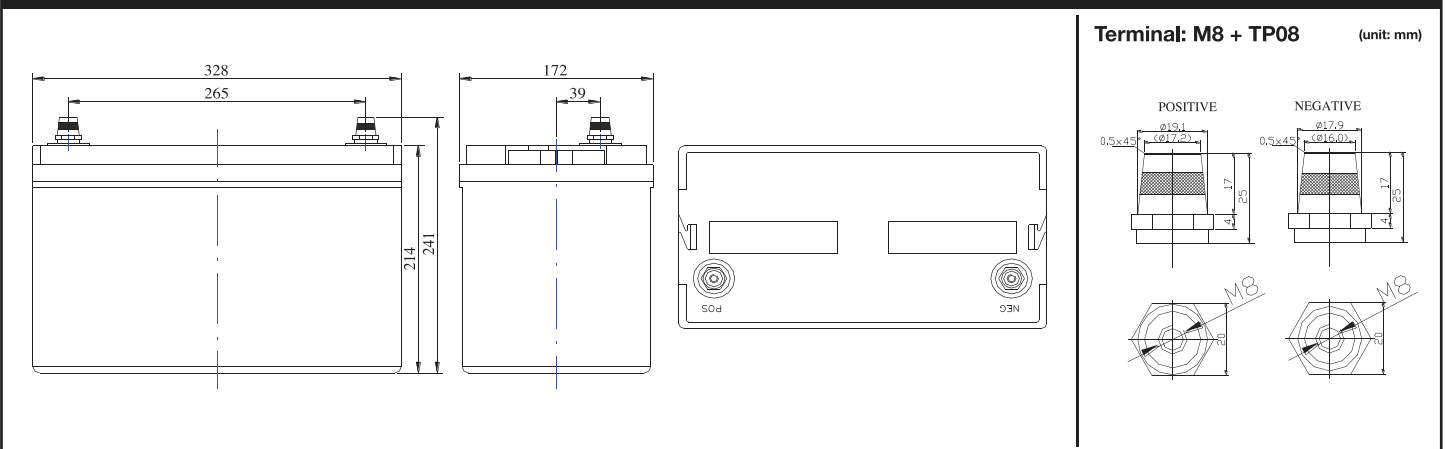

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modifications without notice. Contact Fullriver for the latest information.